



C09-M-403

3503

BOARD DIPLOMA EXAMINATION, (C-09)
MARCH/APRIL—2017
DME—FOURTH SEMESTER EXAMINATION
STRENGTH OF MATERIALS

Time : 3 hours]

[Total Marks : 80

PART—A

3×10=30

Instructions : (1) Answer **all** questions.

(2) Each question carries **three** marks.

(3) Answer should be brief and straight to the point and shall not exceed *five* simple sentences.

1. Calculate the modulus of rigidity of a cylindrical bar having Poisson ratio 0.25 and modulus of elasticity 1×10^5 N/mm².

2. A rod of 32 m long is rigidly fixed at a temperature of 20 °C. Find the stress induced in the rod if the temperature is raised to 90 °C. [Take, $E = 1 \times 10^5$ N/mm² and $\alpha = 12 \times 10^{-6}$ /°C].

3. Define the following :

(a) Resilience

(b) Proof resilience

(c) Modulus of resilience

- * 4. A cantilever beam of 5 m long carries a point load of 4 kN at 3 m from fixed end. Draw the shear force and bending moment diagrams.
5. Define the following terms :
 (a) Reactions
 (b) Point of contraflexure
6. A cantilever beam of length 3 m carries point load at free end. If the maximum slope is 0.01 radians, calculate the deflection at free end.
7. A steel strip of 10 mm thick is bent round a circular drum of 3 m diameter. Calculate the maximum stress developed in the strip. [Take, E for steel 200 kN/mm^2]
8. A close coiled helical spring of 20 coils has a wire diameter of 5 mm and mean coil diameter of 30 mm. Find the stiffness of spring. [Take, $G = 84 \times 10^4 \text{ N/mm}^2$]
9. A hollow circular shaft is having 50 mm external diameter and 35 mm internal diameter. Determine the polar moment of inertia of the shaft.
10. A thin cylindrical shell of 1000 mm diameter is pressurised to 12 bar. If the maximum stress in the shell is not to exceed 60 N/mm^2 , calculate the minimum thickness of the shell required.

PART—B

10×5=50

Instructions : (1) Answer *any five* questions.

(2) Each question carries **ten** marks.

(3) Answers should be comprehensive and the criterion for valuation is the content but not the length of the answer.

- * 11. Discuss the behaviour of a mild steel specimen when subjected to a tensile test.
12. A reinforced concrete column 300 mm × 300 mm in section is provided with 8 steel bars of 200 mm diameter. The column carries a compressive load of 600 kN. Find the load shared by each material. Modular ratio of steel to concrete is 18.

* **13.** The following data refers to a tensile test :

(i) Diameter of steel bar = 300 mm

(ii) Gauge length = 200 mm

(iii) Extension at a load of 100 kN = 0.139 mm

(iv) Load at elastic limit = 200 kN


Calculate the following :

(a) Resilience

(b) Proof resilience

(c) Modulus of resilience

14. Draw the shear force and bending moment diagrams for a simply supported beam shown in the figure below :

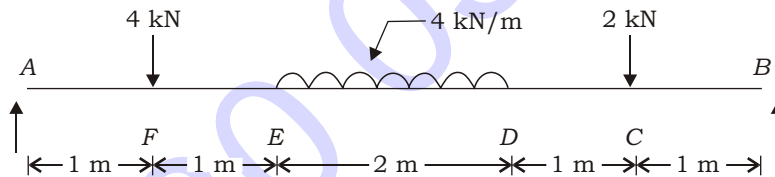

15. Explain the following with sketches :

(a) Types of beam

(b) Types of load

16. Derive the bending equation with usual notations.

* **17.** A hollow shaft with external diameter 150 mm and internal diameter 100 mm is used to transmit power. While transmitting power, it is found that the angle of twist of 1.5° over a length of 2 m. Find (a) the power transmitting at 300 r.p.m. and (b) the maximum shear stress induced.

[Take, modulus of rigidity as $0.8 \times 10^5 \text{ N/mm}^2$]

- * **18.** (a) A close-coiled helical spring of 100 mm mean diameter is made of 10 mm diameter rod and has 18 turns. The spring carries an axial load of 190 N. Determine the (i) shear stress and (ii) deflection when carrying this load. [Assume $G = 0.8 \times 10^5 \text{ N/mm}^2$]
- (b) A 8-mm thick cylindrical shell having 2.2 m diameter and 5 m length is subjected to a fluid pressure of 3 N/mm^2 . Calculate volumetric strain. [Assume Poisson ratio as 0.3 and Young's modulus as $2.1 \times 10^5 \text{ N/mm}^2$]
